

REQUESTING ODYSSEY ON DOCLINE & ISO ILL

Odyssey Overview

This document is primarily designed for non-ILLiad libraries who are using the Odyssey client to receive documents from other Odyssey clients or ILLiad servers. It details the preferred format of your Odyssey client IP address for outgoing DOCLINE and ISO ILL requests to allow ILLiad libraries using Odyssey on their server to automatically receive that information and flag your requests for Odyssey sending.

ILLiad libraries using the DOCLINE web would follow the same instructions as below, with the exception of adding the TN: 1 since ILLiad imports the real Transaction Number at the end of the Patron field.


DOCLINE Web

When sending requests using DOCLINE 2.7 over the web, you can add your Odyssey IP information to the request and ILLiad lending libraries will automatically import those values into the database and flag the request as an Odyssey request.

Within your DOCLINE administrative module, edit a field that you won't normally change very often to have this value in it (with no other text in that field):

[ODYSSEY:123.123.123.123/ILL] TN: 1

where 123.123.123.123 is the IP address or full DNS name of your receiving Odyssey client. We suggest using Comments to Lenders field, as there is no specific field for an Odyssey address. To edit your Comments field, login to Docline and under the Institution tab, click on the Update ABCABC button where ABCABC is your LIBID (see example below).

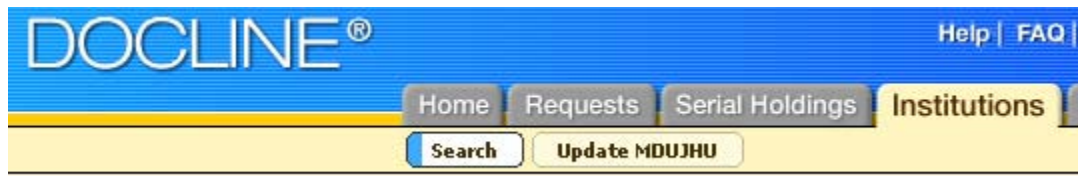

Click the Docline Options to the left.

DOCLINE Options

Edit the Comments to Lenders field so that the Odyssey information is the **last text in the field**.

Comments to Lenders
Chars: 94 of 150

FOR ARIEL REQUESTS, PLEASE: 1 ARTICLE PER TRANSMISSION
[ODYSSEY:123.123.123.123/ILL] TN:1

Save changes at the top of the form.

SAVE

The TN: 1 is key to denote that you are not using ILLiad (and don't have an ILLiad transaction number that you're providing). TN: 1 must be the last text in that field in order for receiving ILLiad libraries to automatically mark your request as an Odyssey request.

ILLiad libraries using DOCLINE Web would omit the TN:1 at the end of that line, as their ILLiad transaction number is in the Patron field.

When an ILLiad lending library downloads your DOCLINE web requests, the information will automatically populate in their database and flag the request for Odyssey sending.

REQUESTING ODYSSEY ON DOCLINE & ISO ILL

DOCLINE Web (cont'd.)

After modifying your Comments to Lender field in the DOCLINE administrative module, all of your outgoing requests would look similar to this:

Patron Name	<input type="text" value="Smith, John"/>	Need No Later Than	<input type="text" value="01012008"/> (MMDDYYYY)
Comments	<input type="text" value="QUESTS, PLEASE: 1 ARTICLE PER TRANSMISSION ---[ODYSSEY:123.123.123.123/ILL] TN: 1"/>		

Note that if you need to add additional comments with the request, to put them at the beginning of the Comments field so that the Odyssey address and TN: 1 are still the last items on the line.

DOCLINE via ISO ILL in ILLiad

Docline requests sent via ISO ILL in ILLiad already have Odyssey information in them as the preferred method of delivery, if you have enabled Odyssey on your server. There is no additional setup necessary.

However, currently that information has only been verified to work with other ILLiad libraries receiving ISO ILL requests and will not display in the correct format for ILLiad lending libraries still using DOCLINE via the web.

ISO ILL

In ILLiad 7.1.0.0 and later, the Odyssey receiving address is automatically sent as the preferred delivery option within the ISO ILL APDU to the lending library. If the receiving library is an ILLiad library, the information will flag that request as an Odyssey request for sending.

If you are using ISO ILL via some other product, there are three fields that need to be completed in the outgoing ILLRequest APDU for the ILLiad lending library to mark the request as an Odyssey request.

- The telecom-service-identifier (1.6.1.0) must have a value of ODYSSEY.
- The telecom-service-address (1.6.1.1) must have a value of 123.123.123.123/ILL where 123.123.123.123 is the IP address or full DNS name of your receiving Odyssey client.
- There must be a number in the transaction-group-qualifier field (1.1.1), which is normally the case as it stores your local unique transaction id for your system.

When an ILLiad library receives the ILLRequest APDU with these values filled out, the information will automatically populate in their database and flag the request as an Odyssey request for sending.

If both sites are using ILLiad version 7.1.0.0 or higher, this process is automatic and requires no additional setup.